Electronic Services - Los Angeles
M11963X

OPERATION & MAINTENANCE HANDBOOK

INSTRUCTION MANUAL

MODEL 103 M

PULSE GENERATOR

Part Number 37000-109

INSTRUMENT REGISTRY

GENERAL ELECTRIC
INSTRUMENTATION & COMMUNICATION
1200 KONA DRIVE
COMPTON, CA 90220
(213) 642-5317

SYSTRON-DONNER CORPORATION

DATAPULSE

10150 W. Jefferson Blvd., Culver City, Calif. 90230
Telephone: 213-836-6100; TWX: 910-340-6766

Postage Will be Paid by Addressee

No Postage Stamp Necessary If Mailed in the United States

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 805 CULVER CITY, CALIFORNIA

DATAPULSE DIVISION

SYSTRON DONNER CORPORATION

P.O. BOX 2549

CULVER CITY, CALIFORNIA 90230

FORM NO. 022 4/67

OPERATION & MAINTENANCE

HANDBOOK

INSTRUCTION MANUAL

MODEL 103 M

PULSE GENERATOR

Part Number 37000-109

DATAPULSE
DIVISION
SYSTRON DONNER
CORPORATION

10150 W. JEFFERSON BLVD., CULVER CITY, CALIFORNIA 90230

EIGHTH EDITION

Printed - November, 1962
Reprint - September, 1963
Reprint - April, 1964
Reprint - March, 1965
Revised - January, 1966
Reprint,- June, 1967
Reprint - February, 1968
Reprint - August, 1969

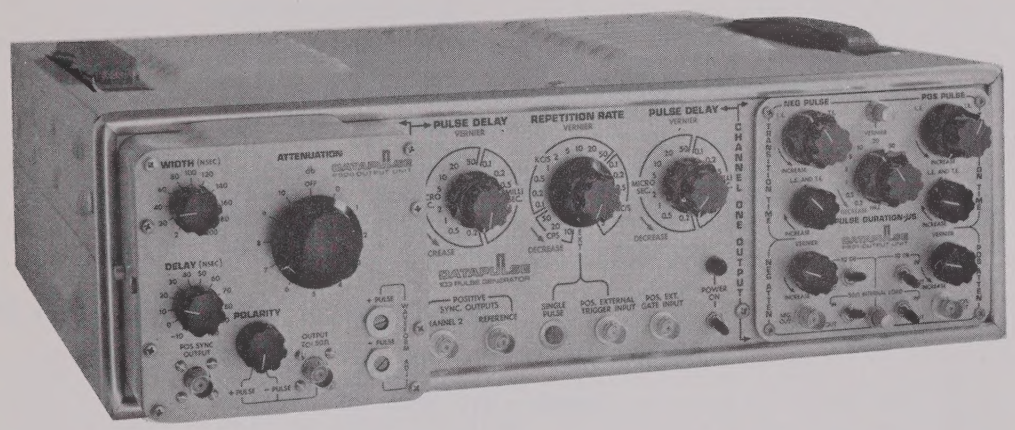

MODEL 103M PULSE GENERATOR

The Datapulse Model 103M Pulse Generator is a compact source of fast repetition rate pulses. When utilized with appropriate output units of the *P900 series the instrument features two-channel operation with each channel output independently variable in delay, width, amplitude, and pulse shape.

This manual provides detailed instructions for the use and maintenance of your Model 103M. A thorough understanding of its contents will contribute to full utilization and longer life of the instrument.

*The P900 series (plug-in) output amplifiers offered for use in the 103M are covered in separate instruction manuals which may be included in this manual.

TABLE OF CONTENTS

TITLE PAGE - i
FRONTISPIECE - ii
CONTENTS - iii
LIST OF ILLUSTRATIONS - iv
LIST OF TABLES - iv
ADDENDA & ERRATA - v

SECTION I SPECIFICATIONS

1.1 REPETITION RATE - 1-1
1.2 EXTERNAL TRIGGER - 1-1
1.3 SINGLE PULSE - 1-1
1.4 GATED OPERATION - 1-1
1.5 SYNC OUTPUTS - 1-1
1.6 MAIN PULSE DELAYS - 1-1
1.7 MAIN PULSE OUTPUT - 1-1
1.8 POWER REQUIRED - 1-1
1.9 CONSTRUCTION - 1-1
1.10 SIZE AND WEIGHT - 1-1
1.11 ACCESSORIES FURNISHED - 1-1
1.12 ACCESSORIES AVAILABLE - 1-1

SECTION II OPERATING INSTRUCTIONS

2.1 DESCRIPTION OF CONTROLS & CONNECTIONS - 2-1
2.2 PLACING IN OPERATION - 2-1
2.3 OPERATING CONSIDERATIONS - 2-1
2.4 SPECIAL APPLICATIONS - 2-1

SECTION III THEORY OF OPERATION

3.1 BLOCK DIAGRAM DESCRIPTION - 3-1
3.2 BLOCK DIAGRAM - 3-1

SECTION IV MAINTENANCE INSTRUCTIONS

4.1 PREVENTIVE MAINTENANCE - 4-1
4.2 TROUBLESHOOTING PROCEDURE - 4-1
4.3 CALIBRATION PROCEDURE - 4-3

SECTION V PARTS LIST 5-1

SCHEMATICS

Drawing Number	Description
J40000-020	Schematic - Time Delay & Delay Trigger Forming Circuits
J40000-062	Schematic - Power Supply
J40000-019	Schematic - Multivibrator, Input Circuitry & Trigger Forming Circuit

LIST OF ILLUSTRATIONS

Figure No.		Page No.
4-1	Model 103M Viewed from Top	4-4
4-2	Model 103M Viewed from Bottom	4-5

LIST OF TABLES

Table No.		
4-1	Characteristic Waveforms	4-2

IMPORTANT! SEE ADDENDA FOR CHANGES TO THIS SECTION.

SECTION I

SPECIFICATIONS

1.1 REPETITION RATE

Continuously variable from less than 5 cps to 5 mc, covered in 18 calibrated steps (1, 2, 5 series) with uncalibrated vernier. Step control accuracy is less than 10%. Stability* is better than 0.05%, jitter is less than 0.02%.

1.2 EXTERNAL TRIGGER

Requires 8v pos. pulse or neg. pulse with accessory inverting transformer, with less than 100 μsec rise time (50 nanosec minimum duration) at 0 to 5 mc, or 8v rms sine wave at 10 kc to 5 mc. Input impedance is approximately 1000 ohms, AC coupled.

1.3 SINGLE PULSE

Operation of front panel pushbutton provides one cycle of outputs.

1.4 GATED OPERATION

Outputs may be gated off by an external control level of pos. 5-15v, gated on at zero volts. Gate input impedance is approximately 1 K shunted by 100pf.

1.5 SYNC OUTPUTS

Pos. 8 to 10 K pulses from 100 ohm source impedance, approximately .05 μsec duration, AC coupled.

1.5.1 Reference Sync

Occurs once in each cycle as the reference for main pulse delays (delayed approximately 30 nanosec from external trigger if used).

1.5.2 Channel Two Sync

Occurs once in each cycle, variably delayed from the Reference Sync by the Channel Two Main Pulse Delay Control as specified below. May be used as a reference sync, with the Channel One delay set at minimum, to provide "advanced pulse" operation of the Channel One Main Pulse Output. Occurs approximately coincident with the leading edge of the Channel Two Main Pulse Output provided when two plug-in output units are used.

1.6 MAIN PULSE DELAYS (of Model 103 triggers to plug-in output units with respect to reference sync — main pulse output leading edge delays are slightly increased by the inherent triggering delay specified for each output unit)

Separately variable for Channels One and Two, continuously from less than 0.1 μsec to 5 millisec, covered in 14 calibrated steps (1, 2, 5 series) plus uncalibrated vernier control. Main pulse output separation, when used as a double pulse generator, is continuously variable over the range ±5 millisec. Step control accuracy is approximately 10%. Stability* better than ±0.05%, jitter is less than 0.02%.

1.7 MAIN PULSE OUTPUT

Any P900 series plug-in output unit may be used, with one unit required for single pulse generation and two units for double pulse operation. Output characteristics are determined by the output units selected.

1.8 POWER REQUIRED

105-125v 50/60 cycle AC, approximately 50 watts, 220v 50/60 cycle operation may be specified at no added cost.

1.9 CONSTRUCTION

Brushed aluminum front panel with etched black and red markings, beige cabinet with quick release top and bottom covers, forced air cooling with filter, provision for plugging in two P900 series output units. All signal connectors are BNC type.

1.10 SIZE AND WEIGHT

5-1/4" h x 17" w x 16-1/2" d. May be rack mounted (5-1/4" x 19" panel space) by specifying Model 103MR, or by installing accessory Type 1003 Rack Mounting Set. Weight is approximately 25 lbs (without plug-in output units).

1.11 ACCESSORIES FURNISHED

One operation and maintenance manual, 8 ft. line cord with NEMA 3 prong plug.

1.12 ACCESSORIES AVAILABLE

P900 Series Output Units, mixer (Type 2302 for P906 unit); 50 ohm, 25 w, power termination (Type 2003); 50 ohm, 50 w power termination (Type 2004); trigger pulse inverting transformer (Type 2101); coaxial cables, connector adapters.

*Stability is specified as variation over ±10% line voltage change from 115 vac.

IMPORTANT! SEE ADDENDA FOR CHANGES TO THIS SECTION.

SECTION II

OPERATING INSTRUCTIONS

2.1 DESCRIPTION OF CONTROLS AND CONNECTORS

2.1.1 Repetition Rate-Vernier

This control is used to select the output pulse repetition rate. The vernier control allows the calibrated rate to be decreased up to a factor of approximately one-third.

2.1.2 Single Pulse

Depression of this button when the repetition rate switch is on EXT. causes one cycle of outputs to occur.

2.1.3 Pos. External Trigger Input

A positive pulse (see Section I, Par. 1.2) applied through this BNC connector will cause an output pulse to occur. A reference sync output will occur after approximately .05 microsec delay.

2.1.4 Pos. Ext. Gate Input

This BNC connector accommodates the external gating signal. When the dc level of this signal is +5 volts, the generator output signals are shut off. They are gated on when the signal drops to zero volts.

2.1.5 Positive Sync Outputs

See Section I, Par. 1.6 for pulse waveshape.

2.1.5.1 Channel 2. A timing pulse occurs at this output approximately coincident with the leading edge of the Channel 2 output pulse.

2.1.5.2 Reference. A pulse occurs at this output which serves as a zero time reference for the main pulse delay.

2.1.6 Pulse Delay - Vernier (Both Controls)

This control is used to select the output pulse delay from the reference sync pulse. The vernier control allows the calibrated delay to be decreased up to a factor of approximately one-third.

2.2 PLACING IN OPERATION

Insert the plug-in units to be used, pressing firmly to insure that connectors make proper contact. Tighten the locking mechanisms. Connect the power cord to the rear of the instrument and to the power line and turn the POWER switch to the ON position.

NO pulse delay or pulse duration switch should be set such that the output pulse spacing is less than twice their setting.

2.3 OPERATING CONSIDERATIONS

CAUTION

2.3.1 External Trigger and Gate Inputs

A voltage transient in excess of 50 volts is to be avoided due to probable damage to the input transistors.

2.3.2 230-Volt Operation

The Model 103M is normally wired for use with a 115v power source. To convert it for use with a 230v source, change the dual primary windings of the power transformer from a parallel combination to a series configuration. (See schematic diagram for details.) When making this change, the line fuse located on the rear of the instrument should be replaced with one of half its value.

2.4 SPECIAL APPLICATIONS

2.4.1 Pulse Advance Operation

Using the Channel 2 sync output as a reference, Channel 1 may be effectively advanced by an amount equal to the difference of the two delays (i.e., Channel 1 output may be either advanced or delayed from Channel 2 output from zero to 5 milliseconds.)

SEE ADDENDA FOR CHANGES

THEORY OF OPERATION

3.1 BLOCK DIAGRAM DESCRIPTION (Refer to Block Diagram and Schematic Diagrams)

A square wave is generated by an astable multivibrator (Q201 - Q208) or by a Schmitt trigger (Q230, 231) when the 103M is externally triggered. This square wave is fed through an inverter which may be gated off through the use of an external positive dc level. The positive going edge of the square wave is shaped into a 20-nanosec wide, negative 2-volt pulse by a trigger forming circuit (Q252, Q253). This negative pulse triggers both pulse delay multivibrators, and is offered as a positive sync pulse for reference purposes, after being amplified by Q254.

The operation of both delay multivibrators is identical. The variable width pulse formed by the multivibrators is differentiated and the trailing edge formed into a negative 2-volt pulse, 20-nanosec wide for use in triggering an appropriate P900 series output unit. The Channel 2 delayed trigger is also amplified by Q346 and offered as a delayed sync output.

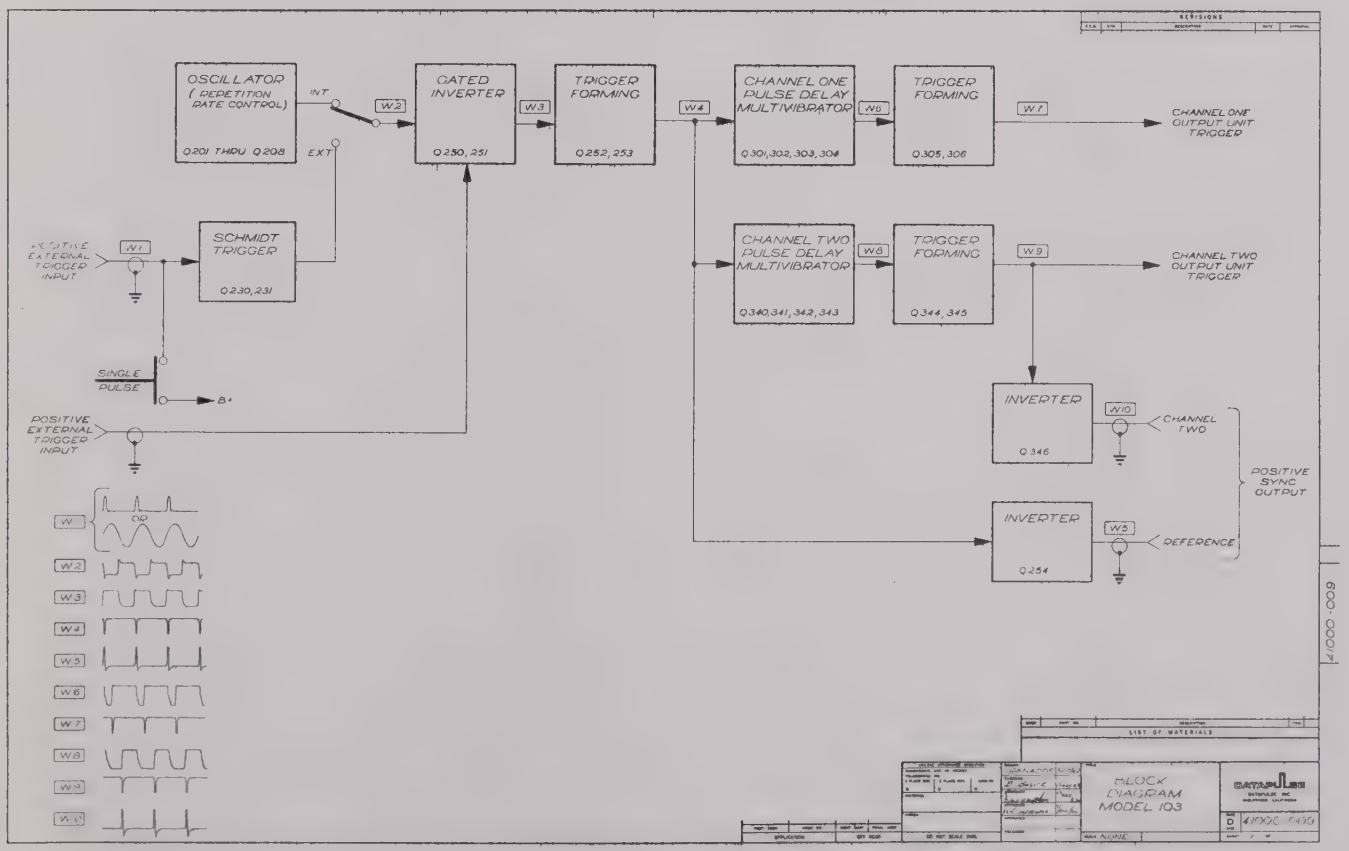

IMPORTANT! SEE ADDENDA FOR CHANGES IN THIS SECTION.

MAINTENANCE INSTRUCTIONS

4.1 PREVENTIVE MAINTENANCE

4.1.1 Cooling

The Model 103M utilized a forced-air cooling system to maintain tolerable temperatures within the unit. It is important that the covers supplied with the unit be kept in place during operation.

The air intake and filter are located at the rear of the instrument. For proper ventilation, maintain at least three inches of clearance about the rear of the unit and be sure no other instruments discharge hot air into the air intake.

Inspect the filter regularly and clean it before it becomes dirty enough to restrict air flow. Clean and restore filter as follows:

1. Remove filter from instrument and wash it in warm water and detergent.
2. Dry filter thoroughly and coat it with a filter adhesive such as Filter Coat #3, made by Research Products Company, Inc. This adhesive comes in convenient spray cans and is available from most heating supply stores.

4.1.2 Recalibration

The Model 103M is a very stable instrument and will provide many hours of trouble-free operation. To insure continued reliability, the power supply, time base and delay circuits should be checked for calibration after each 500 hours of operation, or at least every six months if the unit is used intermittently.

4.1.3 Visual Inspection

Perform a complete visual inspection at regular intervals, preferably once a month. Inspect for loose or broken connections; damaged binding posts; scorched printed circuit boards, wires or resistors; and loose nuts and bolts.

For most visual troubles, the remedy is apparent; however, particular care must be taken when heat-damaged components are detected. Overheating of parts is often the result of other, less apparent defects in the circuit.

4.1.4 Component Replacement and Soldering Considerations

When replacing transistors, diodes, or other heat-sensitive devices, a heat sink should be used between the device and the soldering iron tip. A pair of long-nosed pliers may be used in most cases.

Special care must be taken when soldering printed circuit wiring to avoid overheating and subsequent separation of the printed circuit from its epoxy material.

4.1.5 Power Cable

The three-conductor power cable supplied with this instrument is terminated in a polarized three-prong male connector as recommended by the National Electrical Manufacturer's Association. The third contact is an offset round pin which is added to a standard two-blade connector and grounds the instrument chassis when used with an appropriate receptable.

WARNING

An adapter should be used to connect the NEMA plug to a standard two-contact output. When the adapter is used, the ground connection terminates in a short green lead which should be connected to a suitable ground for the protection of operating personnel.

4.1.6 Removal of Dust Covers

The dust covers are held in place by small screw-head fasteners. To remove, turn the fasteners a quarter turn counterclockwise with a common screw-driver. To remove the top dust cover: (1) loosen the fasteners in the sides of the bottom dust cover; (2) remove the four fasterners on the sides of the top dust cover; (3) loosen the two fasteners on the top of the top dust cover; and (4) lift the cover up and off.

4.2 TROUBLESHOOTING PROCEDURE

Before attempting to troubleshoot the instrument, make sure that the trouble is actually due to a malfunction within the instrument and not to improper control settings or a faulty plug-in unit. The plug-in units may be replaced with others known to be in good condition. If the trouble is still apparent, it is almost a certainty that the 103M is at fault.

Photographic details of various assemblies are shown in this manual. These are provided as parts location guides.

4.2.1 Equipment Required

DC oscilloscope - Tektronix 541, Hewlett-Packard 150A or equivalent.

DC voltmeter - Any voltmeter with greater than 1000 ohms-per-volt sensitivity, calibrated to ±5%.

4.2.2 Isolating the Trouble

The first circuit to check after most malfunctions is the system power supply, +10v, -10v and -5v; do not proceed before these voltages are properly adjusted.

When troubleshooting the 103M, it is useful to consider the instrument as several basic circuits as shown in the block diagram.

Utilizing this drawing with accompanying waveforms, one may isolate the general area of trouble. Once the area is isolated, the schematic diagrams in this manual may be used to locate the defective components.

Refer to the characteristic waveforms section of this manual for further aid in typical waveshapes to be found.

TABLE 4-1. CHARACTERISTICS WAVEFORM

The waveforms shown here should prove useful during troubleshooting. These photographs were taken with a Tektronix Type 581 Oscilloscope with a Type CA dual trace plug-in unit. Waveform numbers correspond to those on the block diagram. Settings: 0.2μs/cm, 2.0v/cm, except W1 is 5v/cm and W2 is 1v/cm.

W1

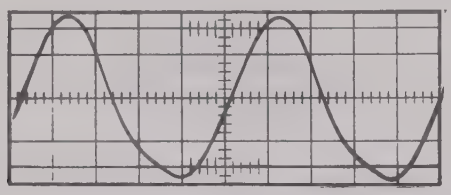

Ext. Sine Wave Input

W1

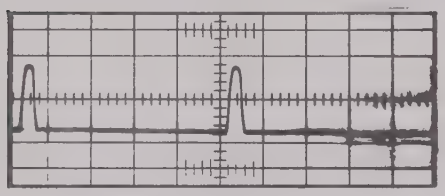

Ext. Pulse Input

W2

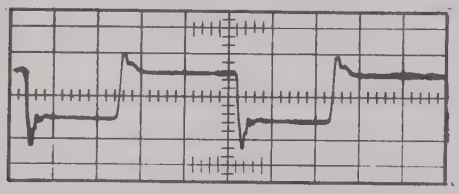

Gated Inverter Input

W3

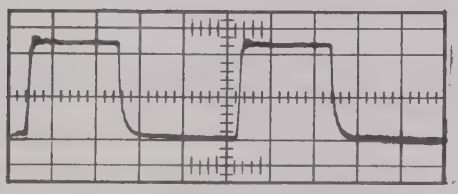

Gated Inverter Output

W4

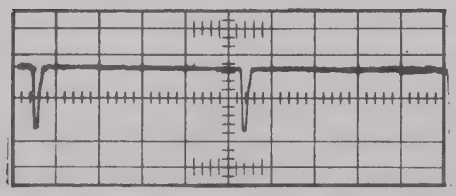

Trigger for Delay Circuits and Reference Sync Output

W5

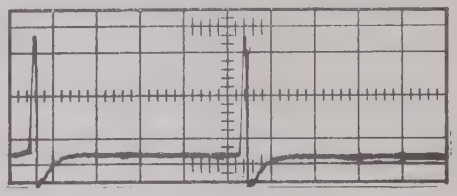

gnd

Pos. Reference Sync Output

W6

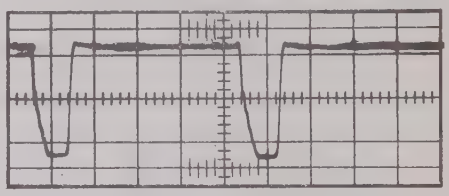

gnd

Channel One Delay Circuit Output

W7

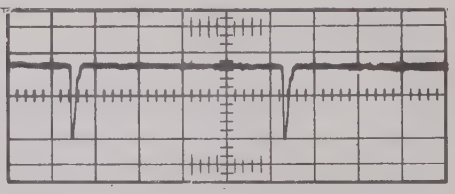

gnd

Channel One Output Unit Trigger

W8

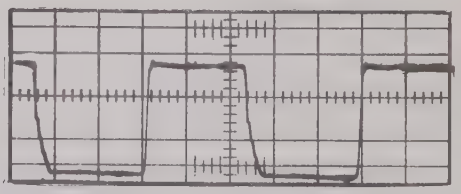

gnd

Channel Two Delay Circuit Output

W9

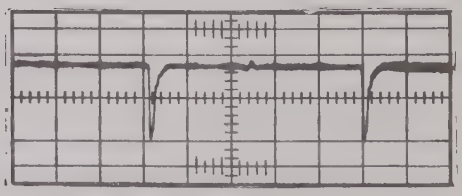

gnd

Trigger for Channel Two Delay Circuit and Channel Two Sync Output

W10

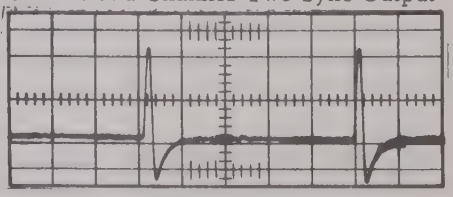

gnd

Channel Two Pos. Sync Output

4.3 CALIBRATION PROCEDURE

4.3.1 Equipment Required

DC oscilloscope - Tektronix 541, Hewlett-Packard 150A or equivalent.

DC voltmeter - Any voltmeter with greater than 1000 ohms-per-volt sensitivity, calibrated to ±5%.

4.3.2 Power Supply

If the power supply voltages are out of specified calibration, adjustment can be made from the bottom of the power supply printed circuit board. The adjustment sequence which must be used is as follows:

1. +10v
2. -10v
3. -5v

4.3.3 Repetition Rate

The repetition rate calibration adjustments are located on the bottom of the instrument, labeled OSC.

Set the REPETITION RATE switch to 50 KC/S, turn the VERNIER control fully clockwise and leave it there throughout the rest of the calibration.

Observing the REFERENCE sync output, adjust the control labeled "50 KC" for correct pulse spacing (20 microsec).

Set the REPETITION RATE switch to 0.1 MC/S and adjust the control labeled "0.1 MC" for correct pulse spacing (10 microsec).

Set the REPETITION RATE switch to 0.2 MC/S and adjust the control labeled "0.2 MC" for correct pulse spacing (5 microsec).

No further repetition rate calibration should be necessary; however, there are trimmer condensers on the top side of the REPETITION RATE switch to adjust the 1 MC/S, 2 MC/S and 5 MC/S ranges if further calibration accuracy is desired on these ranges.

4.3.4 Pulse Delay (Either Channel 1 or Channel 2)

The pulse delay calibration adjustments will be found on the underneath side of the instrument, labeled CHAN 1 DLY and CHAN 2 DLY.

Trigger your syncroscope with the REFERENCE sync output and observe its position on the scope face. All pulse delay measurements will be made from the 50% amplitude point on the leading edge of this pulse, to the 50% point on the leading edge of the pulse generated by the output unit being used.

If the output unit used has a variable rise and fall time feature, these times should be set for minimum.

Set REPETITION RATE control on 50 KC/S.

Set the Pulse Delay control to 1 microsec and turn the Vernier fully clockwise. Leave it there throughout the rest of the calibration.

Observe the output pulse delay from REFERENCE sync time and adjust the 1 μsec calibration control for 1 microsec delay.

Set the Pulse Delay control to 2 microsec and adjust the 2 μsec calibration control for 2 microsec delay.

Set the Pulse Delay control to 5 microsec and adjust the 5 μsec calibration control for 5 microsec delay.

No further delay calibration should now be necessary; however, there are trimmer condensers on the top side of the pulse delay switches to adjust the .5 microsec and .2 microsec ranges if further calibration accuracy is required on these ranges.

This concludes the 103M calibration, for calibration of pulse widths refer to the instruction manual for the output unit being used.

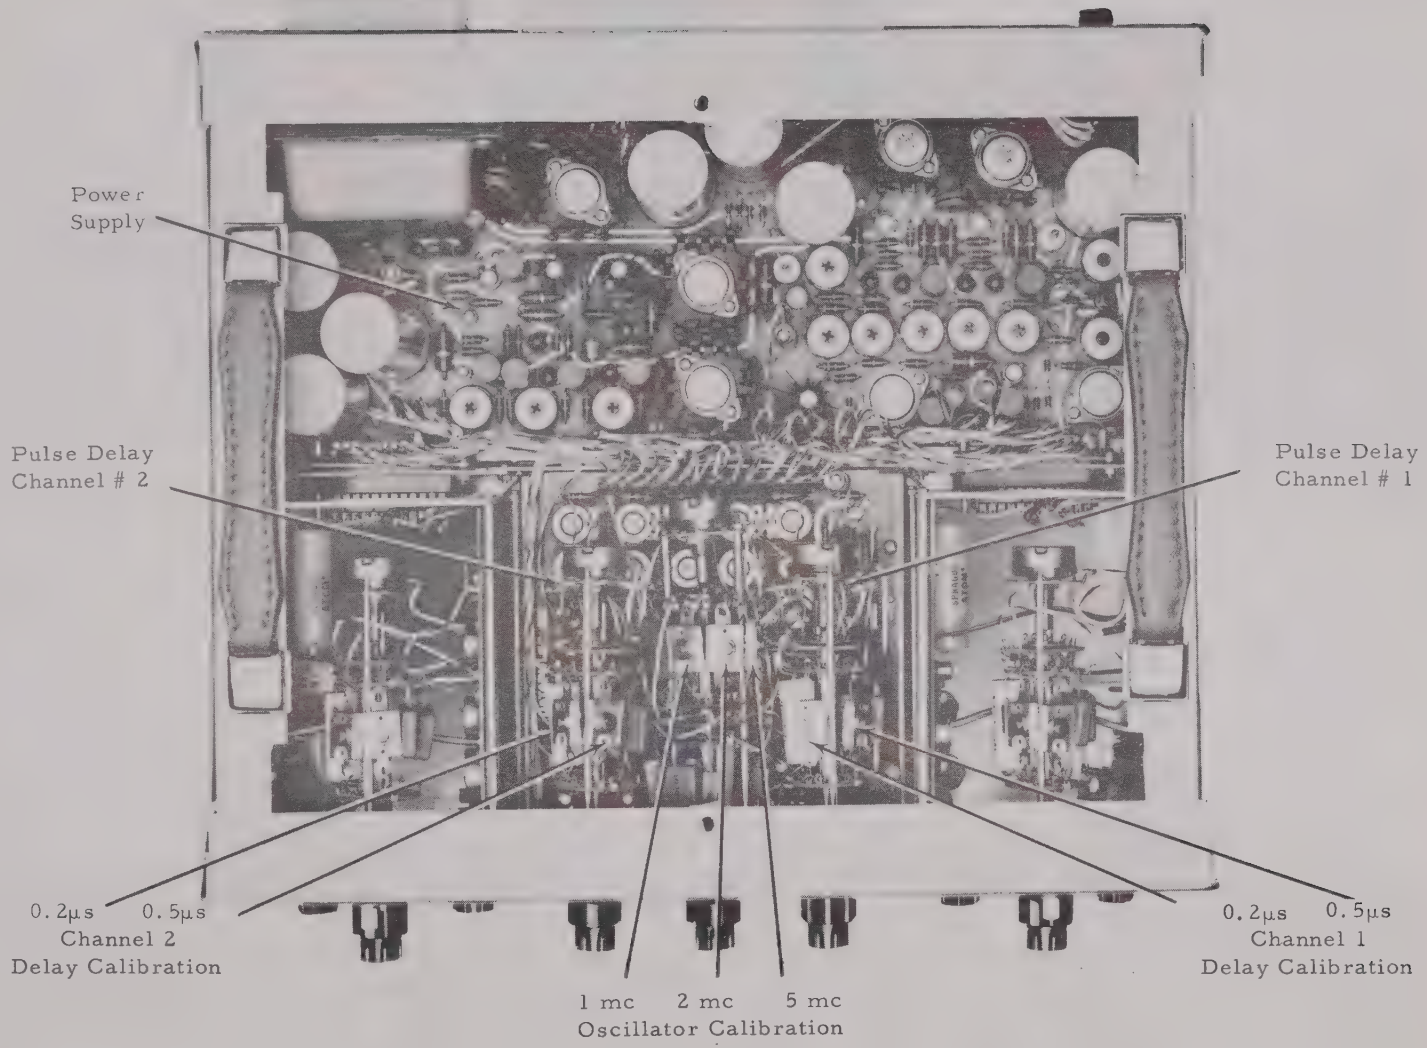

Figure 4-1. Model 103M Viewed from Top

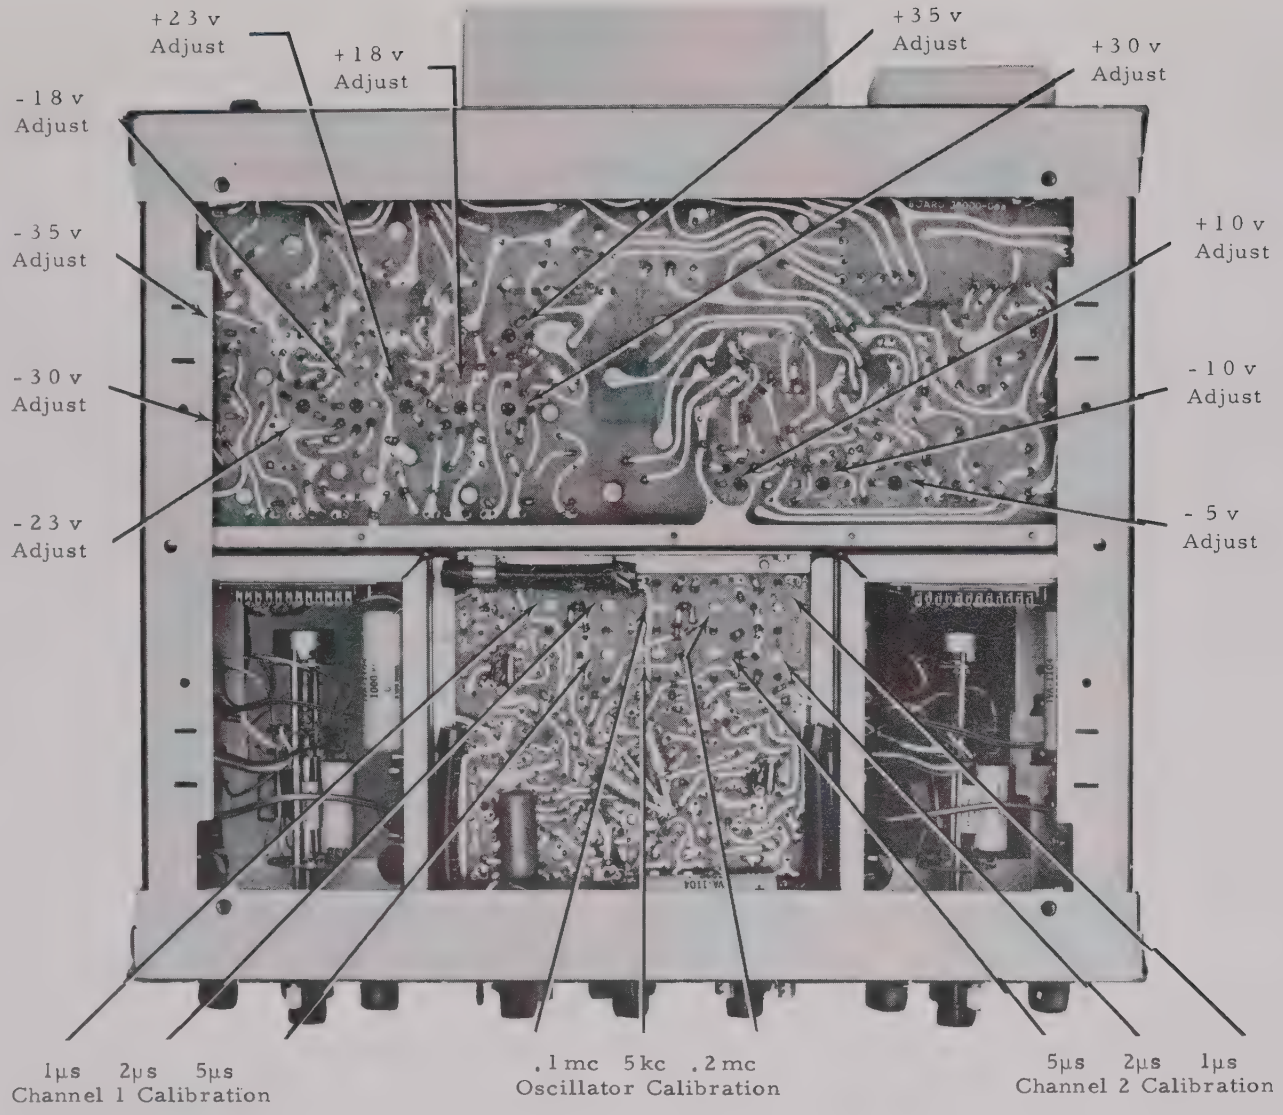

Figure 4-2. Model 103M Viewed from Bottom

IMPORTANT! SEE ANSERDS FOR CHANGES TO THIS SECTION

PARTS LIST

5.1 HOW TO USE THIS PARTS LIST

5.1.1 Reference Designations

Reference designations used throughout this listing correspond with reference designations given on component location photos and the following schematics:

Drawing No. J40000-019
Drawing No. J40000-020
Drawing No. J40000-062

Resistors are designated as R1, R2, R3, etc, and are fixed value, composition, 10%, and 1/2 w unless otherwise noted.

Capacitors are designated as C1, C2, C3 etc., and are fixed value, 10% and 500v DC unless otherwise noted.

Diodes are designated as CR1, CR2, CR3; switches as S1, S2, S3; inductors as L1, L2, and L3; Transistors are Q1, Q2, Q3, etc.

5.1.2 Abbreviations

The following abbreviations are used:

CER:	Ceramic
DPC:	Deposited Carbon
ELECT.	Electrolytic
M:	Mica
GMV:	Guaranteed Min. Value
OF:	Oil Filled
PT:	Paper Tubular
SM:	Silver Mica
VAR:	Variable
WW:	Wire Wound
PNP:	Positive-Negative-Positive
NPN:	Negative-Positive-Negative
µsec:	Microsecond
µf:	Microfarad
ns:	Nanosecond
ms:	Millisecond
MP:	Metalized Paper
TANT:	Tantalum
PIV:	Peak Inverse Voltage
PC:	Printed Circuit
Germ:	Germanium
SPDT:	Single Pull Double Throw

5.1.3 Federal Manufacturers Code Numbers

Manufacturers of the components used in this instrument are referenced herein by Federal Supply Code numbers as listed below:

Company	Federal Code Number
Allen-Bradley	01121
Chicago Telephone	71450
General Radio	24655
Ward Lenard	06136
Sangamo	00853
MEC Inc.	None
Cornell Dublier	09023
Electro Cube	14752
Sprague	56289
Arco	02799
Comark	None
Erie	91674
Motorola	94990
Texas Instruments, Inc.	01295
Philco	98329
General Instrument	14936
Alco	95146
Centralab	71590
PCA	None
Drake	72765
ACDC	08742
Bushman	71400
Corning	07115
Melrain	08984
Magnetic Components	14831
Hughes Aircraft, SC Div.	73293
Nashville Electronics	None
Sylvania Electric	93332
Radio Corp. of America	02735
Fairchild Semiconductor	07263
General Electric	03508
Mallory	37942
Hoffman Semiconductor	99942
Technitrol Engineering	90095
Elco	91662
Wilco	99818
Oak	81716
Lafayette Radio	75491
Pacific Semiconductors	01281
Datapulse Incorporated	15933
Elmenco Products	04062
Capco Corporation	04099
Texas Capacitor	09134
Switchcraft Inc.	82389
Ohmite Mfg. Company	03615
General Instruments	91719
Wilco Company	79327
Beckman Instruments	80740

PARTS LIST

5.2 DELAY SWITCH ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.2.1		Resistors			
R314	1	1K, 2w, 20%, Var.	20053-102	01121	
R323	1	3.6K, 5%	10011-362	01121	EB3625
5.2.2		Capacitors			
C302	1	1.0 µf, 100v, 1%	11093-105		
C303	1	0.1 µf, 100v, 1%, VTQ	11093-104	56289	
C304	1	.01 µf, 300v, 1%, S.M.	11025-103	00853	
C305	1	1000 pf, 1%, S.M.	11027-102	00853	
C306	2	2.7 to 300 pf, 175v, Var. M.	11313-300	02799	461
C307	1	68 pf, 5%	11017-680	00853	
C309		Same as C306			
5.2.3		Switches			
S301	1	Rotary, 14 pos., 3 Pole, Shorting	25250-007	81716	

PARTS LIST

5.3 OSCILLATOR SWITCH ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.3.1		Resistors			
R202	1	5.1K, 5%	10011-512	01121	EB5125
R203	1	15K, 5%	10011-153	01121	EB1535
R212	1	1K, 2w, 20%, Var.	20053-102	01121	
5.3 2		Capacitors			
C202	2	47 pf, 5%, S.M.	11017-470		
C203	1	100 pf, 5%, S.M.	11017-101		
C204	2	1000 pf, 1%, S.M.	11027-102		
C205	2	.01 µf, 300v, 1%, S.M.	11025-103		
C206	2	0.1 µf, 100v, 1%, VTQ	11093-104	56289	
C207	2	1.0 µf, 100v, 1%	11093-105		
C208	2	10 µf, 25v, Tant.	11511-106		
C209	3	4 to 30 pf, 175v, M.	11307-300	02799	461
C210	1	27 pf	11017-270		
C211		Same as C209			
C212		Same as C202			
C213		Same as C209			
C214	1	82 pf, 5%, S.M.	11017-820		
C215		Same as C204			
C216		Same as C205			
C217		Same as C206			
C218		Same as 207			
C219		Same as C208			
5.3.3		Switches			
S201		Rotary, 20 pos., 4 sec., Shorting	25250-020	81716	

PARTS LIST

5.4 POWER SUPPLY P.C. BOARD ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.4.1	Resistors				
R2 and R3	12	1K	10021-102	01121	EB1021
R4	12	470 Ω	10021-471	01121	EB4711
R5	7	2.7 Ω, 1w	10022-279	01121	GB27G1
R6	2	2.2K	10021-222	01121	EB2221
R7	1	100 Ω, 1w	10022-101	01121	GB1011
R8		Same as R4			
R9	11	500 Ω, 2w, 20%, Var. WWPC	10493-501	08984	HHH-2
R10		Same as R4			
R20	1	1 Ω, 10w, 5%, WW	10305-100	06136	10F1WL
R21 and R22		Same as R2			
R23		Same as R4			
R24		Same as R6			
R25 and R26		Same as R5			
R27		Same as R4			
R28		Same as R9			
R29		Same as R4			
R38		Same as R4			
R40	1	22 Ω, 2w	10023-220	01121	HB2201
R41		Same as R4			
R42		Same as R9			
R43		Same as R4			
R44		Same as R2			
R45	1	3.3K	10021-332	01121	EB3321
R46	1	330 Ω	10021-331	01121	EB3311
R47	3	100 Ω	10021-101	01121	EB1011
R48		Same as R2			
R61		Same as R2			
R62	2	1K, 1w	10022-102	01121	GB1021
R63		Same as R47			
R68		Same as R4			
R69		Same as R9			
R70		Same as R4			
R71		Same as R2			
R72		Same as R9			
R73	1	150 Ω	10021-151	01121	EB1511
R74	2	100 Ω, 10w, 5%, WW	10305-101	06136	10F100WL
R75 and R76		Same as R5			
R77	4	390 Ω	10021-391	01121	EB3911

PARTS LIST

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.4.1		Resistors (continued)			
R78	4	4.7K	10021-472	01121	EB4721
R81		Same as R2			
R82		Same as R62			
R83		Same as R47			
R89		Same as R9			
R90		Same as R4			
R91		Same as R9			
R92		Same as R2			
R93	1	470 Ω, 2w	10023-471	01121	HB4711
R94		Same as R74			
R95 and R96		Same as R5			
R97		Same as R77			
R98		Same as R78			
R100	3	100 Ω, 2w	10023-101	01121	HB1011
R101		Same as R9			
R102	2	1.5K	10021-152	01121	EB1521
R103		Same as R78			
R104		Same as R9			
R105		Same as R77			
R107		Same as R2			
R108	2	150 Ω, 10w, 5%, WW	10305-151	06136	10F150WL
R120		Same as R100			
R121		Same as R9			
R122		Same as R102			
R123		Same as R78			
R124		Same as R9			
R125		Same as R77			
R126		Same as R100			
R127		Same as R2			
R128		Same as R108			

PARTS LIST

5.4 POWER SUPPLY P.C. BOARD ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.4.2		Capacitors			
C1 and C2	2	.1 µf, 400v, Mylar	11066-104	02799	4DP-3-104
C4	7	1500 µf, 50v, Elect.	11162-158	00853	PLP-1500-50V
C5 and C6	9	100 µf, 35v, Elect.	11162-107	Nashville	20-500BP/100-35S85
C20 and C21		Same as C4			
C22 and C23		Same as C5			
C41		Same as C5			
C60		Same as C4			
C61 and C62		Same as C5			
C63	2	.1 µf, 75v, CER Disc.	11242-104	71590	DDA-104
C80		Same as C4			
C81 and C82		Same as C5			
C83		Same as C63			
C100		Same as C4			
C120		Same as C4			

PARTS LIST

5.4 POWER SUPPLY P.C. BOARD ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.4.3		Transistors			
Q1	7	Germ., PNP, 5 amp.	12455-008	94990	2N1535
Q2	7	Silicon PNP, To-5	22595-000	15933	59-0
Q3 and Q4	8	Silicon PNP	12605-005	07263	2N3638
Q20		Same as Q1			
Q21		Same as Q2			
Q22 and Q23		Same as Q3			
Q40 and Q41	2	Silicon, NPN, To -18	22635-004	15933	63-4
Q42		Same as Q2			
Q43		Same as Q1			
Q60		Same as Q1			
Q61		Same as Q2			
Q62 and Q63		Same as Q3			
Q64		Same as Q1			
Q80		Same as Q1			
Q81		Same as Q2			
Q82		Same as Q3			
Q83		Same as Q3			
Q84		Same as Q2			
Q100 and Q101	2	Silicon, NPN, Med. Power to -5	12695-001	94990	2N2270
Q120		Same as Q1			
Q121		Same as Q2			

PARTS LIST

5.4 POWER SUPPLY P.C. BOARD ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
CR1	27	Silicon, PIV	22194-001	15933	19-1
CR2		Same as CR1			
CR3	1	Zener, 5.6v, 1w, 10%	12154-032		LMZX5.6
CR20 and CR21		Same as CR1			
CR61 thru CR63		Same as CR1			
CR64	1	Zener, 10v, 1w, 5%	12154-022	37942	ZA10B
CR80 thru CR83		Same as CR1			
CR100 thru CR103		Same as CR1			
CR104	2	Zener, 15v, 10w,	12156-003	99942	1N2979R or 1N1606
CR106 thru CR108		Same as CR1			
CR120 thru CR123		Same as CR1			
CR124		Same as CR104			
CR125 thru CR128		Same as CR1			

5.4 5 Miscellaneous

	2	Connector, 24 Pin, Blue Ribbon	15050-004	Amphenol	26-190-24

PARTS LIST

5.5 FRONT PANEL ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.5.1		Switches			
	1	Toggle, SPDT, Sub. Min.	15280-001	95146	MST115D
	1	Push Button	15300-001	82389	903
5.5.2		Miscellaneous			
	1	Lamp, NE2H, Red with Nut	15450-002	72765	H116-323 RED
	2	Pulse Delay Switch Assembly	37000-053		
	1	Oscillating Switch Assembly	37000-054		

PARTS LIST

5.6 TIMING CIRCUIT PC BOARD ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.6.1		Resistors			
R1		100K, Long Leads	10021-104	01121	EB1041
R201	1	5.1K, 5%	10011-512	01121	EB5125
R204	1	25K, .2w, 30%, Var.	20240-253	71450	Series UPE70
R205	2	15K	10021-153	01121	EB1531
R206	1	10K, .2w, 30%, Var.	20240-103	71450	Series UPE70
R207	1	6.8K	10021-682	01121	EB6821
R208	5	5K, .2w, 30%, Var.	20240-502	71450	Series UPE70
R209	11	3.3K	10021-332	01121	EB3321
R210	14	470 Ω	10021-471	01121	EB4711
R211	12	1K	10021-102	01121	EB1021
R213		Same as R210			
R214		Same as R209			
R215	7	220 Ω	10021-221	01121	EB2211
R216 and R217	6	47 Ω	10021-470	01121	EB4701
R218 and R219		Same as R210			
R220 and R221		Same as R216			
R222		Same as R210			
R223		Same as R215			
R224		Same as R209			
R225		Same as R211			
R226	4	47K	10021-473	01121	EB4731
R227		Same as R205			
R228		Same as R209			
R229 and R230	6	2.2K	10021-222	01121	EB2221
R240		Same as R229			
R241		Same as R211			
R242		Same as R229			
R243	1	3.3K, 5%	10011-332	01121	EB3325
R244	1	8.2K, 5%	10011-822	01121	EB8225
R245		Same as R216			
R246	1	600 Ω	10021-681	01121	EB6811
R247		Same as R215			
R248		Same as R209			
R249	1	4.7K	10021-472	01121	EB4721
R250	2	10K	10021-103	01121	EB1031
R251		Same as R210			

PARTS LIST

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.6.1		Resistors (continued)			
R260		Same as R211			
R261		Same as R209			
R262		Same as R216			
R263		Same as R250			
R264		Same as R215			
R265		Same as R209			
R266		Same as R226			
R267 and R268		Same as R210			
R269	3	100 Ω	10021-101	01121	EB1011
R270		Same as R211			
R271	2	27K	10021-273	01121	EB2731
R272	2	100 Ω, 2w	10023-101	01121	EB1011
R301		Same as R211			
R302		Same as R210			
R303	2	1.5K	10021-152	01121	EB1521
R304		Same as R209			
R305		Same as R211			
R306	2	1K, .2w, 30%, Var.	20240-102	71450	Series UPE70
R307	6	330 Ω	10021-331	01121	EB3311
R308		Same as R208			
R309		Same as R229			
R310		Same as R208			
R311		Same as R211			
R312		Same as R210			
R313		Same as R269			
R315		Same as R307			
R316		Same as R209			
R317		Same as R226			
R318	2	270 Ω	10021-270	01121	EB2701
R319		Same as R210			
R320		Same as R215			
R321	2	33 Ω	10021-330	01121	EB3301
R322		Same as R307			
R340		Same as R211			
R341		Same as R210			
R342		Same as R303			
R343		Same as R209			
R344		Same as R211			
R345		Same as R306			
R346		Same as R307			
R347		Same as R208			
R348		Same as R229			
R349		Same as R208			
R350		Same as R211			
R351		Same as R210			
R352		Same as R269			
R354		Same as R307			

PARTS LIST

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.6.1		Resistors (continued)			
R355		Same as R209			
R356		Same as R226			
R357		Same as R318			
R358		Same as R210			
R359		Same as R215			
R360		Same as R211			
R361		Same as R271			
R362		Same as R272			
R363		Same as R321			
R364		Same as R307			

PARTS LIST

5.6 TIMING CIRCUIT P.C. BOARD ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.6.2		Capacitors			
C220	6	0.1 µf, 75v, -20%, +80%, CER.	11242-104	71590	DDA-104
C221 and C222	2	1.0 µf, 50v, -20%, +65%, Elect.	11152-105	MEC	EG8-1-50P
C223	13	100 pf, 5%, S.M.	11017-101	00853	RR1310
C224		Same as C220			
C225	1	1000 µf, 15v, Elect.	11150-108	56289	TVA-1104
C226	3	10 µf, 20v, Tant.	11511-106	56289	150D-106X-9020B2
C240 and C241	2	0.5 µf, 200v, Mylar	11064-504	02799	ZDP-5-504
C242 and C243		Same as C223			
C260 and C261		Same as C223			
C262		Same as C220			
C263		Same as C223			
C264		Same as C220			
C265	2	220 uuf, 5%, S.M.	10017-221	00853	RR1322
C301		Same as C223			
C310		Same as C223			
C311		Same as C220			
C312		Same as C223			
C313		Same as C226			
C314	2	100 µf, 12v, Elect.	11151-10T	09023	NLW100-12
C340		Same as C223			
C349		Same as C223			
C350		Same as C220			
C351		Same as C223			
C352		Same as C314			
C353		Same as C223			
C354		Same as C265			
C355		Same as C226			

PARTS LIST

5.6 TIMING CIRCUIT P.C. BOARD ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.6.3		Transistors			
Q201	3	Ger., PNP	22595-000	15933	59-0
Q202	19	Ger., PNP	22465-000	15933	46-0
Q203 and Q204	4		22465-001	15933	46-1
Q205 and Q206		Same as Q202			
Q207 and Q208	2		22605-003	15933	60-3
Q230 and Q231		Same as Q202			
Q250 thru Q254		Same as Q202			
Q301		Same as Q203			
Q302		Same as Q202			
Q303		Same As Q202			
Q304		Same as Q201			
Q305 and Q306		Same as Q202			
Q340		Same as Q203			
Q341		Same as Q202			
Q342		Same as Q202			
Q343		Same as Q201			
Q344 thru Q346		Same as Q202			

PARTS LIST

5.6 TIMING CIRCUIT P.C. BOARD ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.6.4		Diodes			
CR201 and CR202	12	Silicon	22164-000	15933	16-0
CR203	1	Zener, 5.6v, 1w, 10%	12154-000	14936	1N1520
CR240		Same as CR201			
CR250		Same as CR201			
CR261 and CR262		Same as CR201			
CR301 and CR302		Same as CR201			
CR304		Same as CR201			
CR305	2	Zener, 5.1v, 5%, 400 mw	12154-002	01295	IN751A
CR340		Same as CR201			
CR341		Same as CR201			
CR343		Same as CR201			
CR344		Same as CR305			
5.6.5		Miscellaneous			
	3	Component Holders	15420-200	Atlee	100-200-16-27
DL260	3	Delay Line, 1000Ω, 3", RG65U (.015 us)	30000-005		
DL301		Same as DL260			
DL340		Same as DL260			
	1	Term. Strip, 13 Pin	16800-000	Cinch Jones	326-20-13-013

PARTS LIST

5.7 BACK PANEL ASSEMBLY

REF. NO.	QTY. USED	DESCRIPTION	DATAPULSE PART NO.	FEDERAL MFRS. CODE NO.	MFRS. PART NO.
5.7.1		Miscellaneous			
	1	Fuse-3A Fast Blo	15470-003	71400	AGC-3
	1	Transformer	24010-001	08742	15225

APPLICATIONS BULLETIN

NO. 103-1

GENERATION OF WAVEFORM COMPLEMENT OUTPUTS USING MODEL 103 AND TWO TYPE P901, P902 OR P903 PLUG-INS

AND

GENERATION OF TWO CHANNELS OF VARIABLY DELAYED TRIGGERS USING MODEL 103 AND ONE TYPE P904/2 PLUG-IN UNIT

The Type P901, P902, and P903 Plug-in Output Units provide an NRZ (non-return-to-zero) position on the pulse width control range switch. This function is designed primarily for use of these units in conjunction with the Model 200 or 202 Data Generators and is not useable with Model 103 or 103M instruments serialled 110 and under unless such units have been modified as indicated below.

In units with higher serials, one P901, P902, or P903 plug-in may be used, set for NRZ operation, to provide pulse outputs initiated by the Channel One delay and terminated by the Channel Two delay, providing typical outputs as follows:

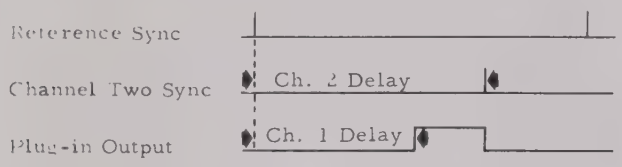

Also, in units with higher serials, two P901, P902, or P903 plug-ins may be used, set for NRZ operation, to provide waveform complement outputs, typically as follows:

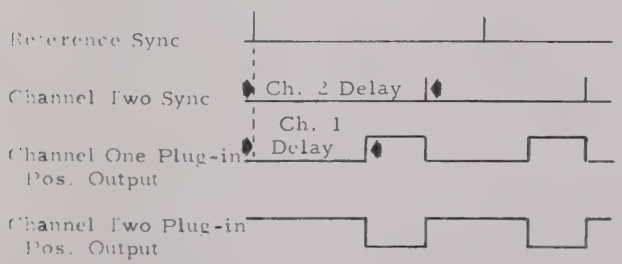

The recently announced Type P904/2 Plug-in Output Unit provides two channels of "trigger standardizing", designed to convert low power, low amplitude triggers (generated at the plug-in unit connectors in the Model 103 and similiar units) into higher power, fixed-width triggers for external use.

When used with any Model 103M instruments (Model 103 including power supply option M), each Type P904/2 plug-in provides, as Trigger Output A, a trigger pulse variably delayed by the basic instrument controls; no output occurs at Trigger Output B when used with Model 103M units serialled 110 and under unless such instruments have been modified as indicated below.

When used with higher serialled Model 103M instruments, plugged into either output channel, the Type P904/2 plug-in provides one Trigger Output delayed by the Model 103M Channel One delay controls and one Trigger Output delayed by the Channel Two delay controls.

Earlier serialled Model 103M instruments may be retrofitted to provide performance as described above by 1) connecting together pins 17 and 18 of the Amphenol blue-ribbon connector for the Channel One plug-in and running a wire to pin 16 of the Channel Two connector, 2) similiarly connecting pins 17 and 18 of the Channel Two connector to pin 16 of the Channel One connector, and 3) reflecting this change in the instruction manual for the unit.

APPLICATIONS BULLETIN
NO. 103-2

MODEL 103M-S1

(Model 103 Modified to Allow Independent Triggering of Channel 2)

The standard Model 103M Pulse Generator provides means for powering and triggering any two P900 Series plug-in output units with independently controlled delay, from an internal oscillator or a single external trigger. The modification described in this bulletin enables use of the instrument as a means for independent triggering of two plug-in output units.

SIMPLIFIED BLOCK DIAGRAM, MODEL 103M-S1

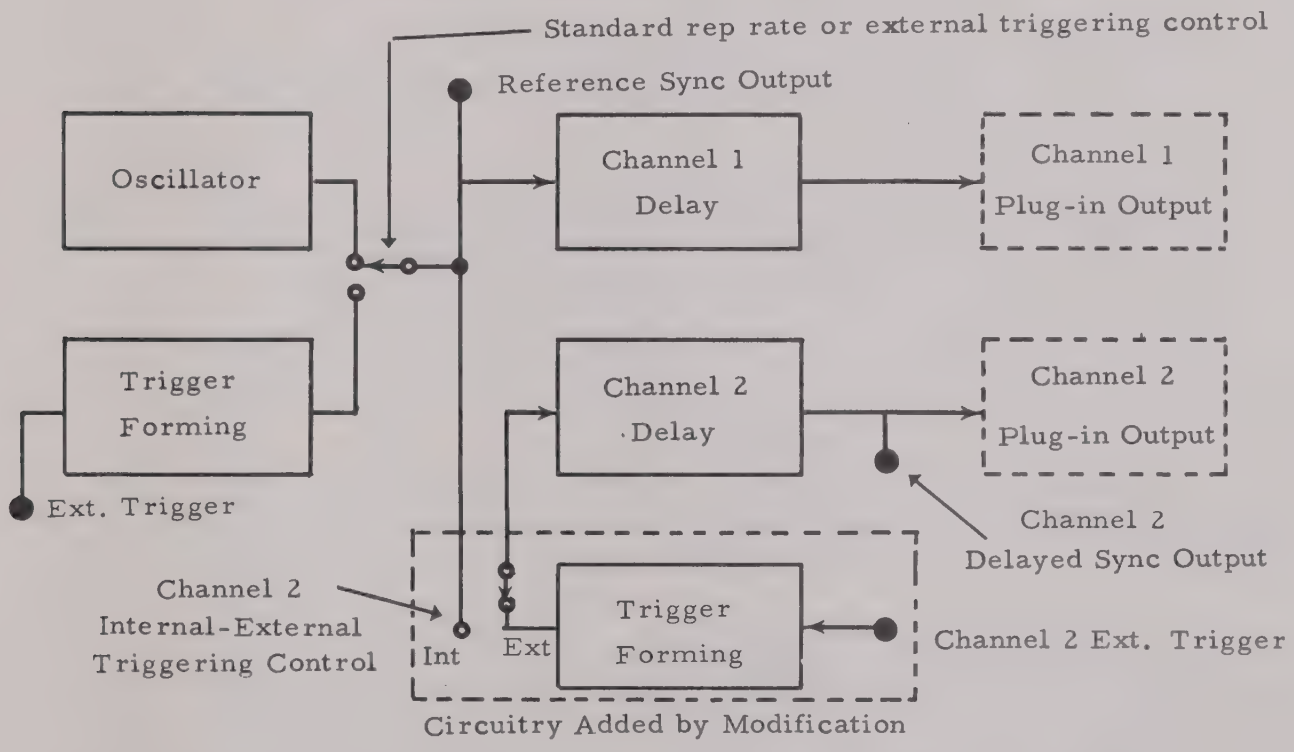

Block Diagram Description: In the standard unit, both delay channels are triggered from either the internal oscillator or from a single external trigger. In the modified unit the following options are available, selected by proper setting of the standard and added trigger source controls:

Mode	Channel 1 Trigger	Channel 2 Trigger
Internal Trigger	Internal Oscillator	Internal Oscillator
Single External Trigger	Main External Trigger	Main External Trigger
Separate External Triggers	Main External Trigger	Channel 2 External Trigger
Internal & External Triggers	Internal Oscillator	Channel 2 External Trigger

General: Specifications are identical to those of the standard Model 103M except as listed below.

Channel 2 Triggering: Channel 2 may be selected by panel toggle switch to trigger from the same source as Channel 1 (Internal Oscillator or Main External Trigger Input) or from the Channel 2 External Trigger Input.

Channel 2 External Trigger Input: Requires neg. pulse of at least 2v (10v max.), rise time approx. 20 nanosec., width at least 50 nanosec. Front panel BNC connector.

Price: Add $115.00 to Model 103M list price.

APPLICATIONS:

Pulse Standardizer and/or Two Channel Delayed Trigger Generator--used with one P904 Plug-in (providing ±5 or ±15v from approx. 50 ohms source, 50 nanosec., wide triggers from each channel), provides two completely independent delayed trigger outputs from external trigger inputs.

Single Pulse Generator and Delayed Trigger Generator--used with any P900 Series Plug-in in Channel 1, provides a fully controllable single pulse (externally or internally triggered) from Channel 1 plus the Channel 2 Delayed Sync Output, which may be initiated either by the Channel 1 trigger or by a separate external trigger.

Two Channel Pulse Generator--used with any two P900 Series Plug-ins, provides a fully controllable single pulse (externally or internally triggered) from Channel 1 plus a separately controlled single pulse from Channel 2, which may be initiated either by the Channel 1 trigger or by a separate external trigger.

To provide variable delay, amplitude and duration clock or bit sync outputs from Model 200M or 202M Data Generators, use unit as a Two Channel Pulse Generator as described above, externally triggering Channels 1 and 2 with the desired Data Generator Sync Outputs.

To provide variable delay data outputs from Model 200M Data Generator (not feasible for NRZ output), (1) remove plug-in output units from Model 200M and replace (in Channel 1) with one P904 Plug-in with both outputs set for neg. 5v output (which now provides programmed triggers for both Channels 1 and 2), (2) install in Model 103M-S1 the plug-ins removed from the Model 200M, (3) set the Model 103M-S1 Rep Rate control to "External" and the Channel 2 Triggering Control to "External", connect outputs of the P904 to the 103M-S1 External Input Jacks, (4) adjust 103M-S1 delay controls for desired delay from the Model 200M Clock Sync Output, adjust 103M-S1 plug-ins for desired data amplitude and duration.

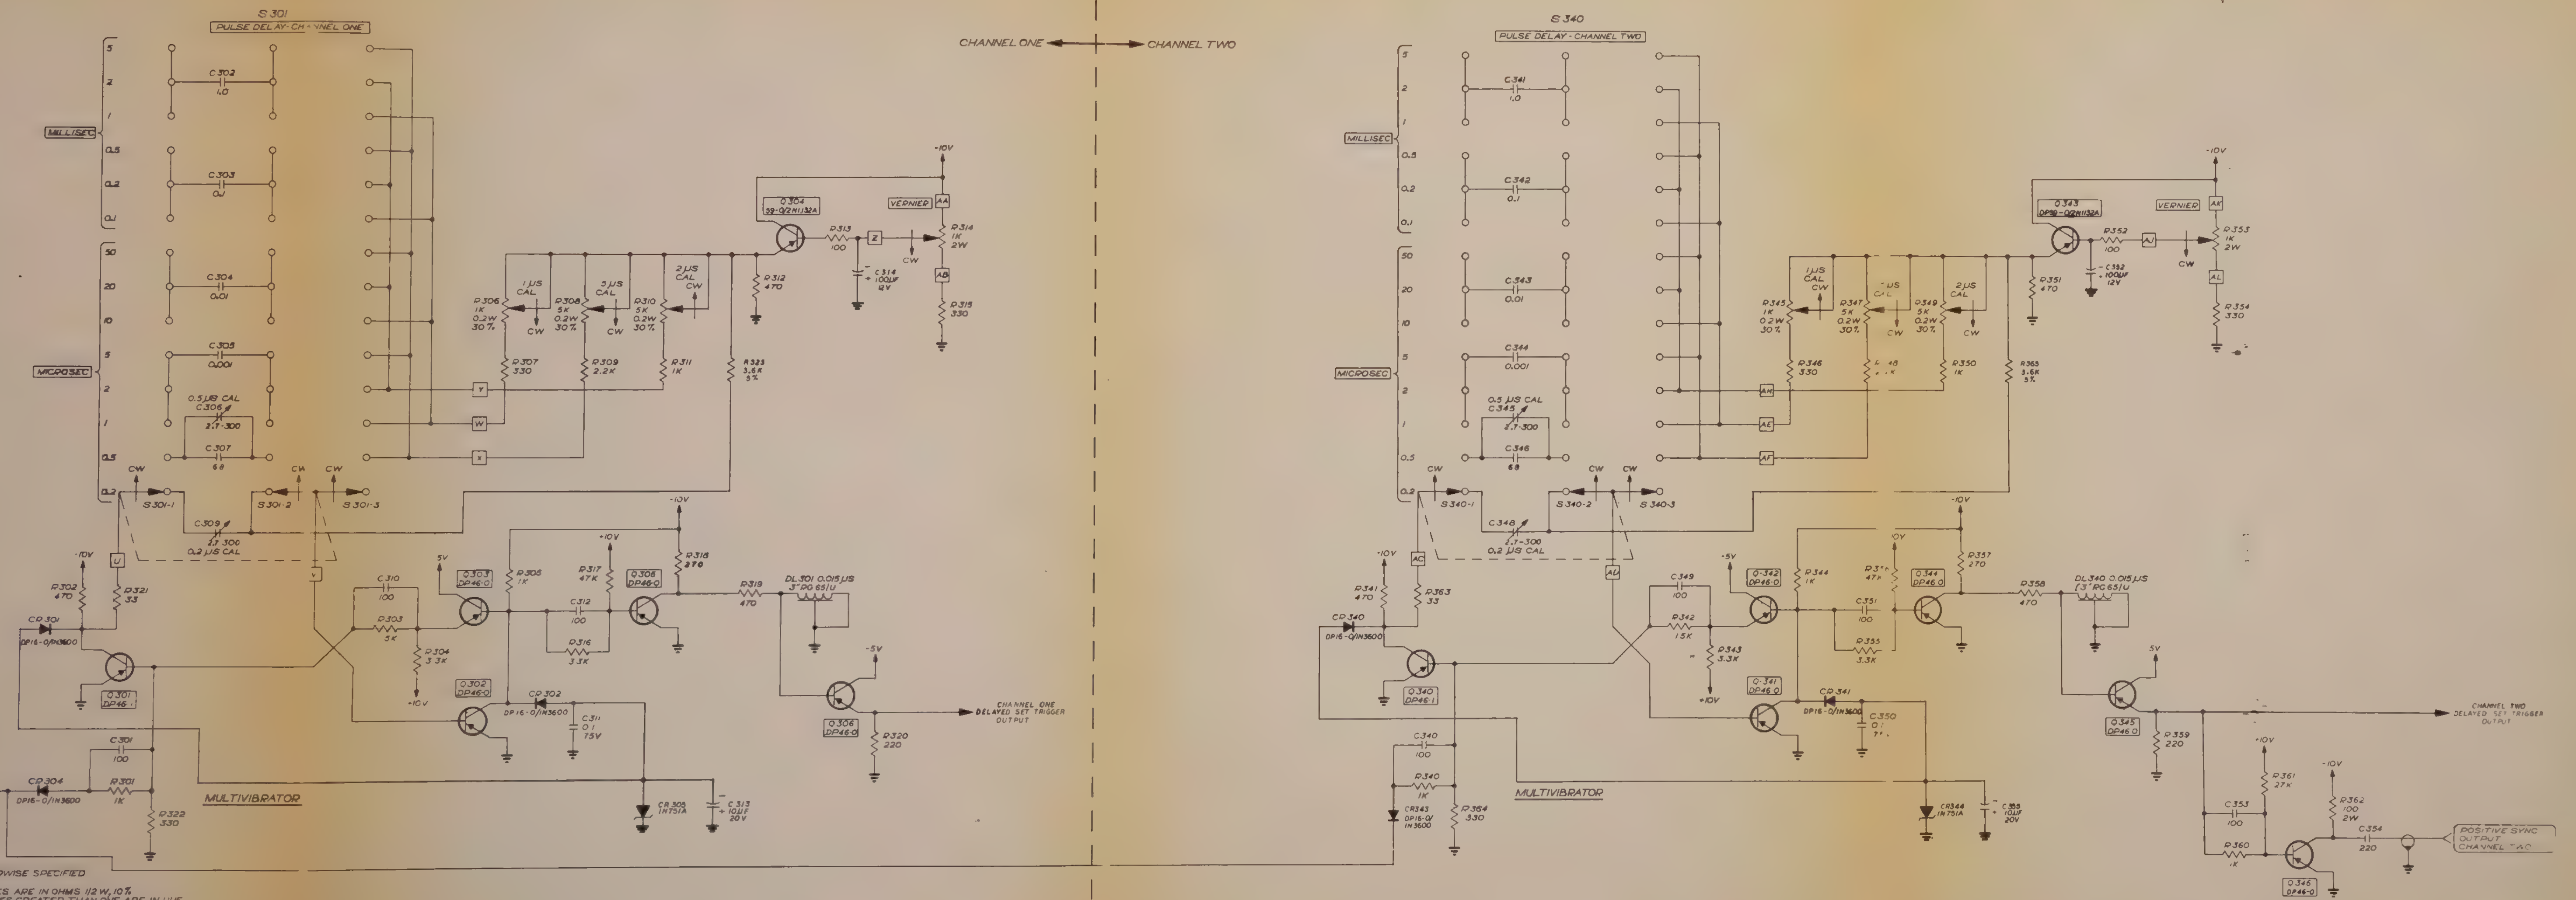

NOTES UNLESS OTHERWISE SPECIFIED

1. ALL RESISTOR VALUES ARE IN OHMS 1/2 W, 10%
2. ALL CAPACITOR VALUES GREATER THAN ONE ARE IN μμF.
3. ALL CAPACITOR VALUES LESS THAN ONE ARE IN μF
4. BOXED WORDING INDICATES FRONT PANEL NOMENCLATURE
5. BOXED NUMBER AND/OR LETTERS INDICATE SPECIFIC LABELED POINTS ON CIRCUIT BOARD
6. ALL TRANSISTORS ARE DP46-0/2N964A

FOR PART REQUIREMENTS SEE LIST OF MATERIAL

FIRST USED	LAST USED	OMITTED	ASSOCIATED DRAWINGS	USED ON
C 301 R 301	C 356 R 365	R306, 339, 34 , 309 C308, 315-339, 347, 352 R 324 339		103

REFERENCE DESIGNATIONS — APPLICATION

GRANADOS

SCHEMATIC - TIME DELAY AND DELAY TRIGGER FORMING CIRCUITS

NONE CODE 3533

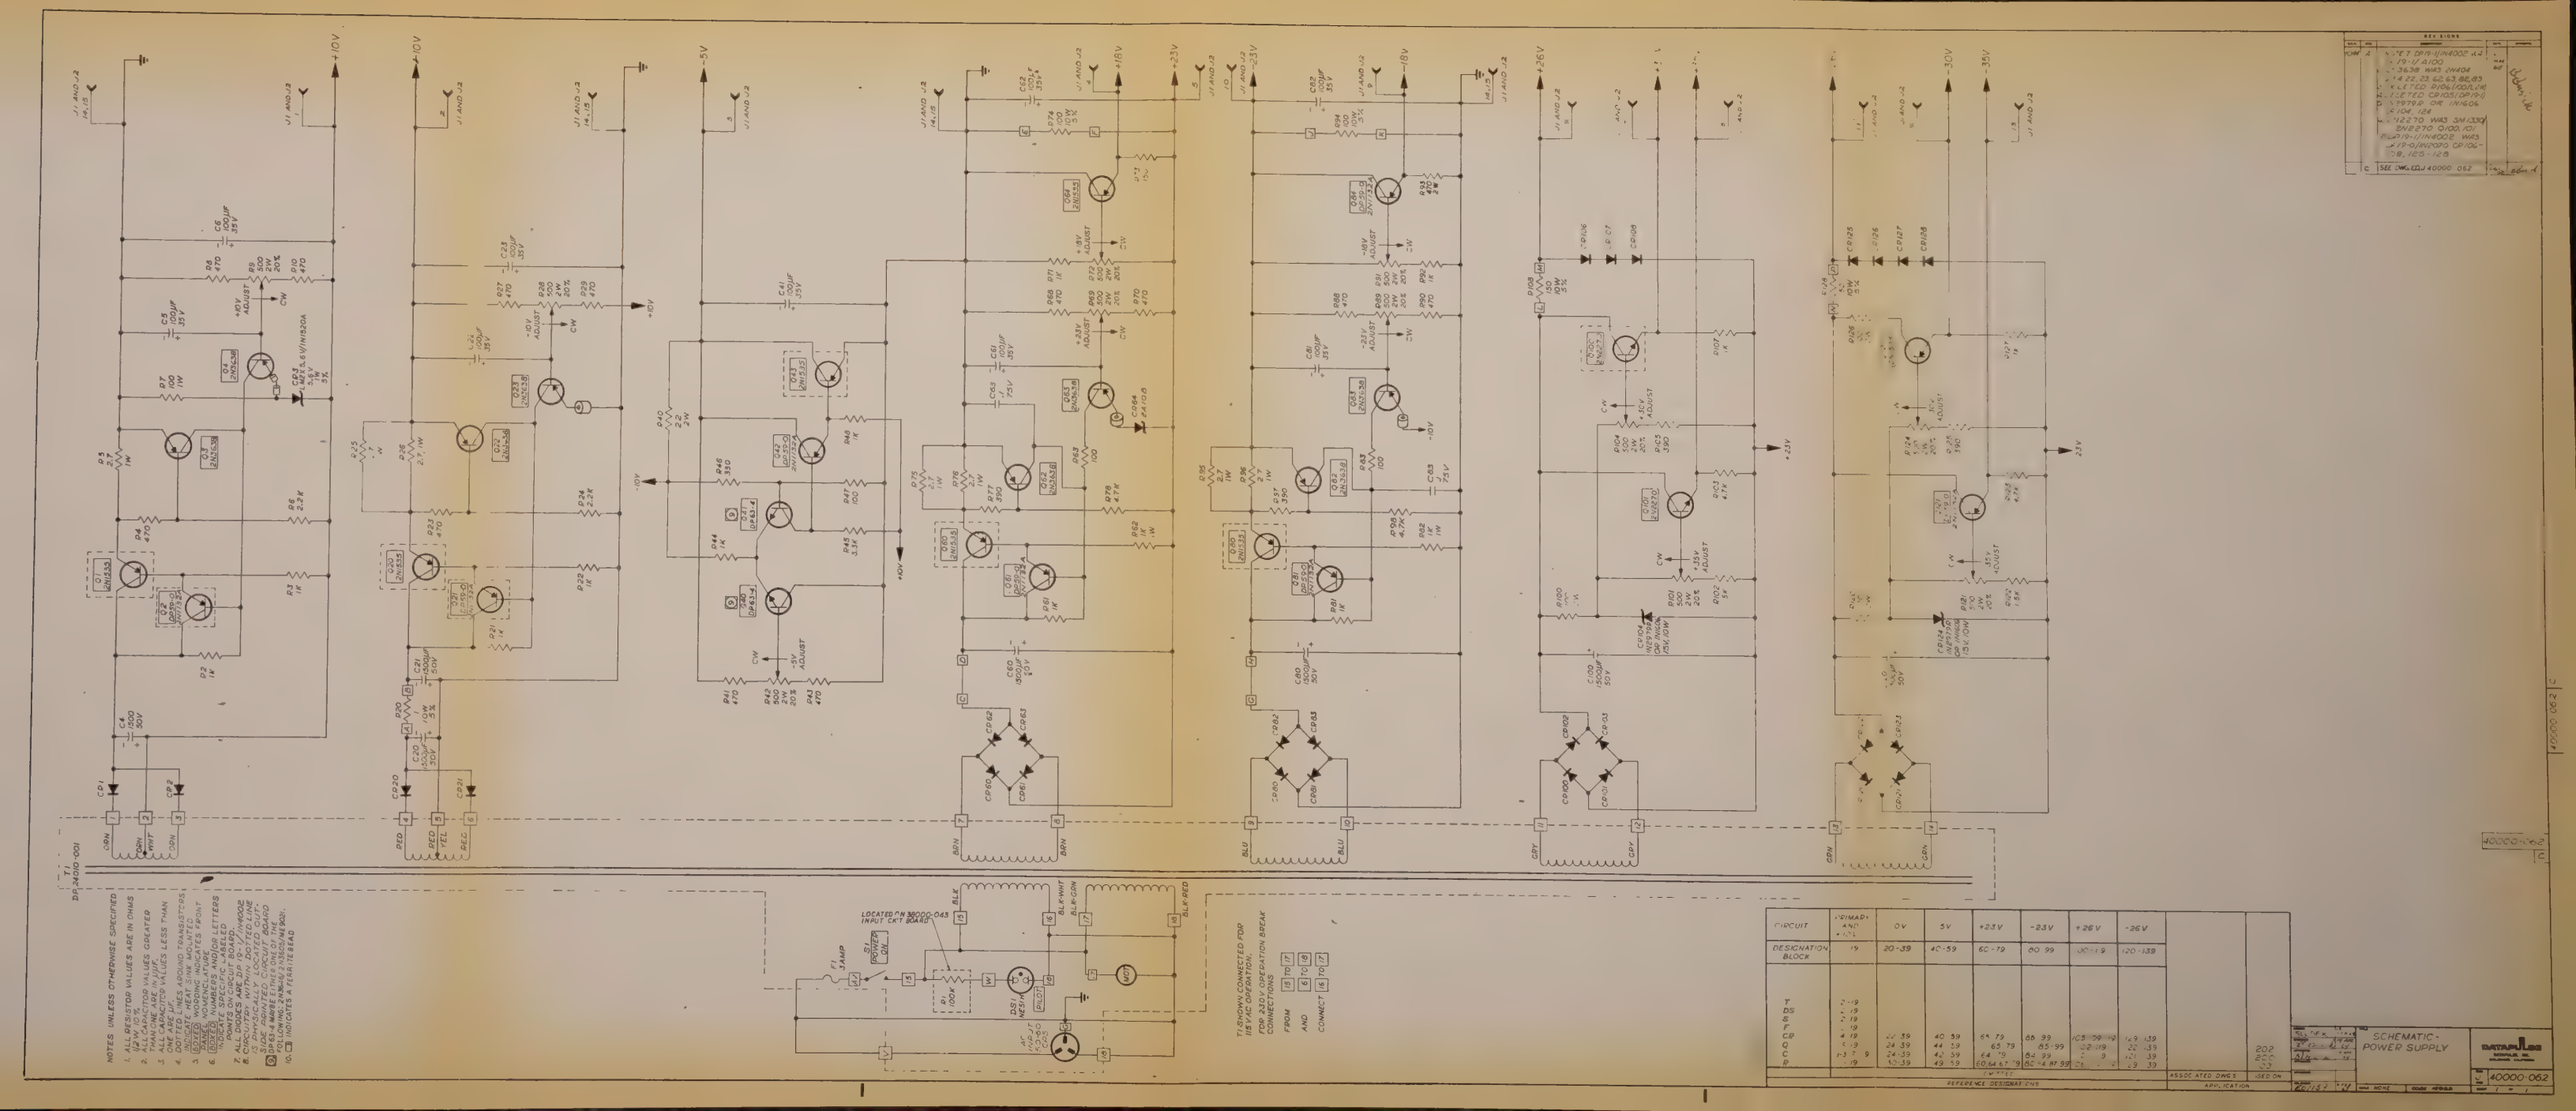
NOTES UNLESS OTHERWISE SPECIFIED
1. ALL RESISTOR VALUES ARE IN OHMS
2. ALL CAPACITOR VALUES GREATER THAN 1 ARE IN MFD
3. ALL CAPACITOR VALUES LESS THAN ONE ARE IN MICROFARADS
4. DIODES ARE SHOWN AROUND TRANSISTORS FOR HEAT SINK MOUNTED ONLY
5. (D) INDICATES TEST POINT
6. (E) INDICATES EDGE CONNECTOR PIN
7. ALL DIODES ARE 1N4002
8. CIRCUITS WITHIN DOTTED AREA ARE PHYSICALLY LOCATED OUTSIDE OF CIRCUIT BOARD
9. (R) INDICATES A RESISTOR MOUNTED ON THE CIRCUIT BOARD
10. (T) INDICATES A TERMINAL BOARD
T1 DP-2400-001
+10V
-10V
+5V
+16V
+23V
-23V
+26V
-26V
-5V
+30V
-30V
+35V
-35V
+10V ADJUST
-10V ADJUST
+16V ADJUST
-16V ADJUST
+23V ADJUST
-23V ADJUST
+26V ADJUST
-26V ADJUST
+30V ADJUST
-30V ADJUST
-5V ADJUST
LOCATED ON 30000-043 INPUT CKT BOARD
S1 POWER ON
F1 5 AMP
T1 SHOWN CONNECTED FOR 115 VAC OPERATION. FOR 230 VAC OPERATION BREAK CONNECTIONS FROM 16 TO 17 AND 6 TO 8 CONNECT 16 TO 17
CIRCUIT
ORIGINATING BLOCK
DESIGNATION
REFERENCE DESIGNATIONS
ASSOCIATED DWGS
APPLICATION
USED ON
SCHEMATIC, POWER SUPPLY
DATAPULSE
40000-062
SEE DWG. CDU 40000-062

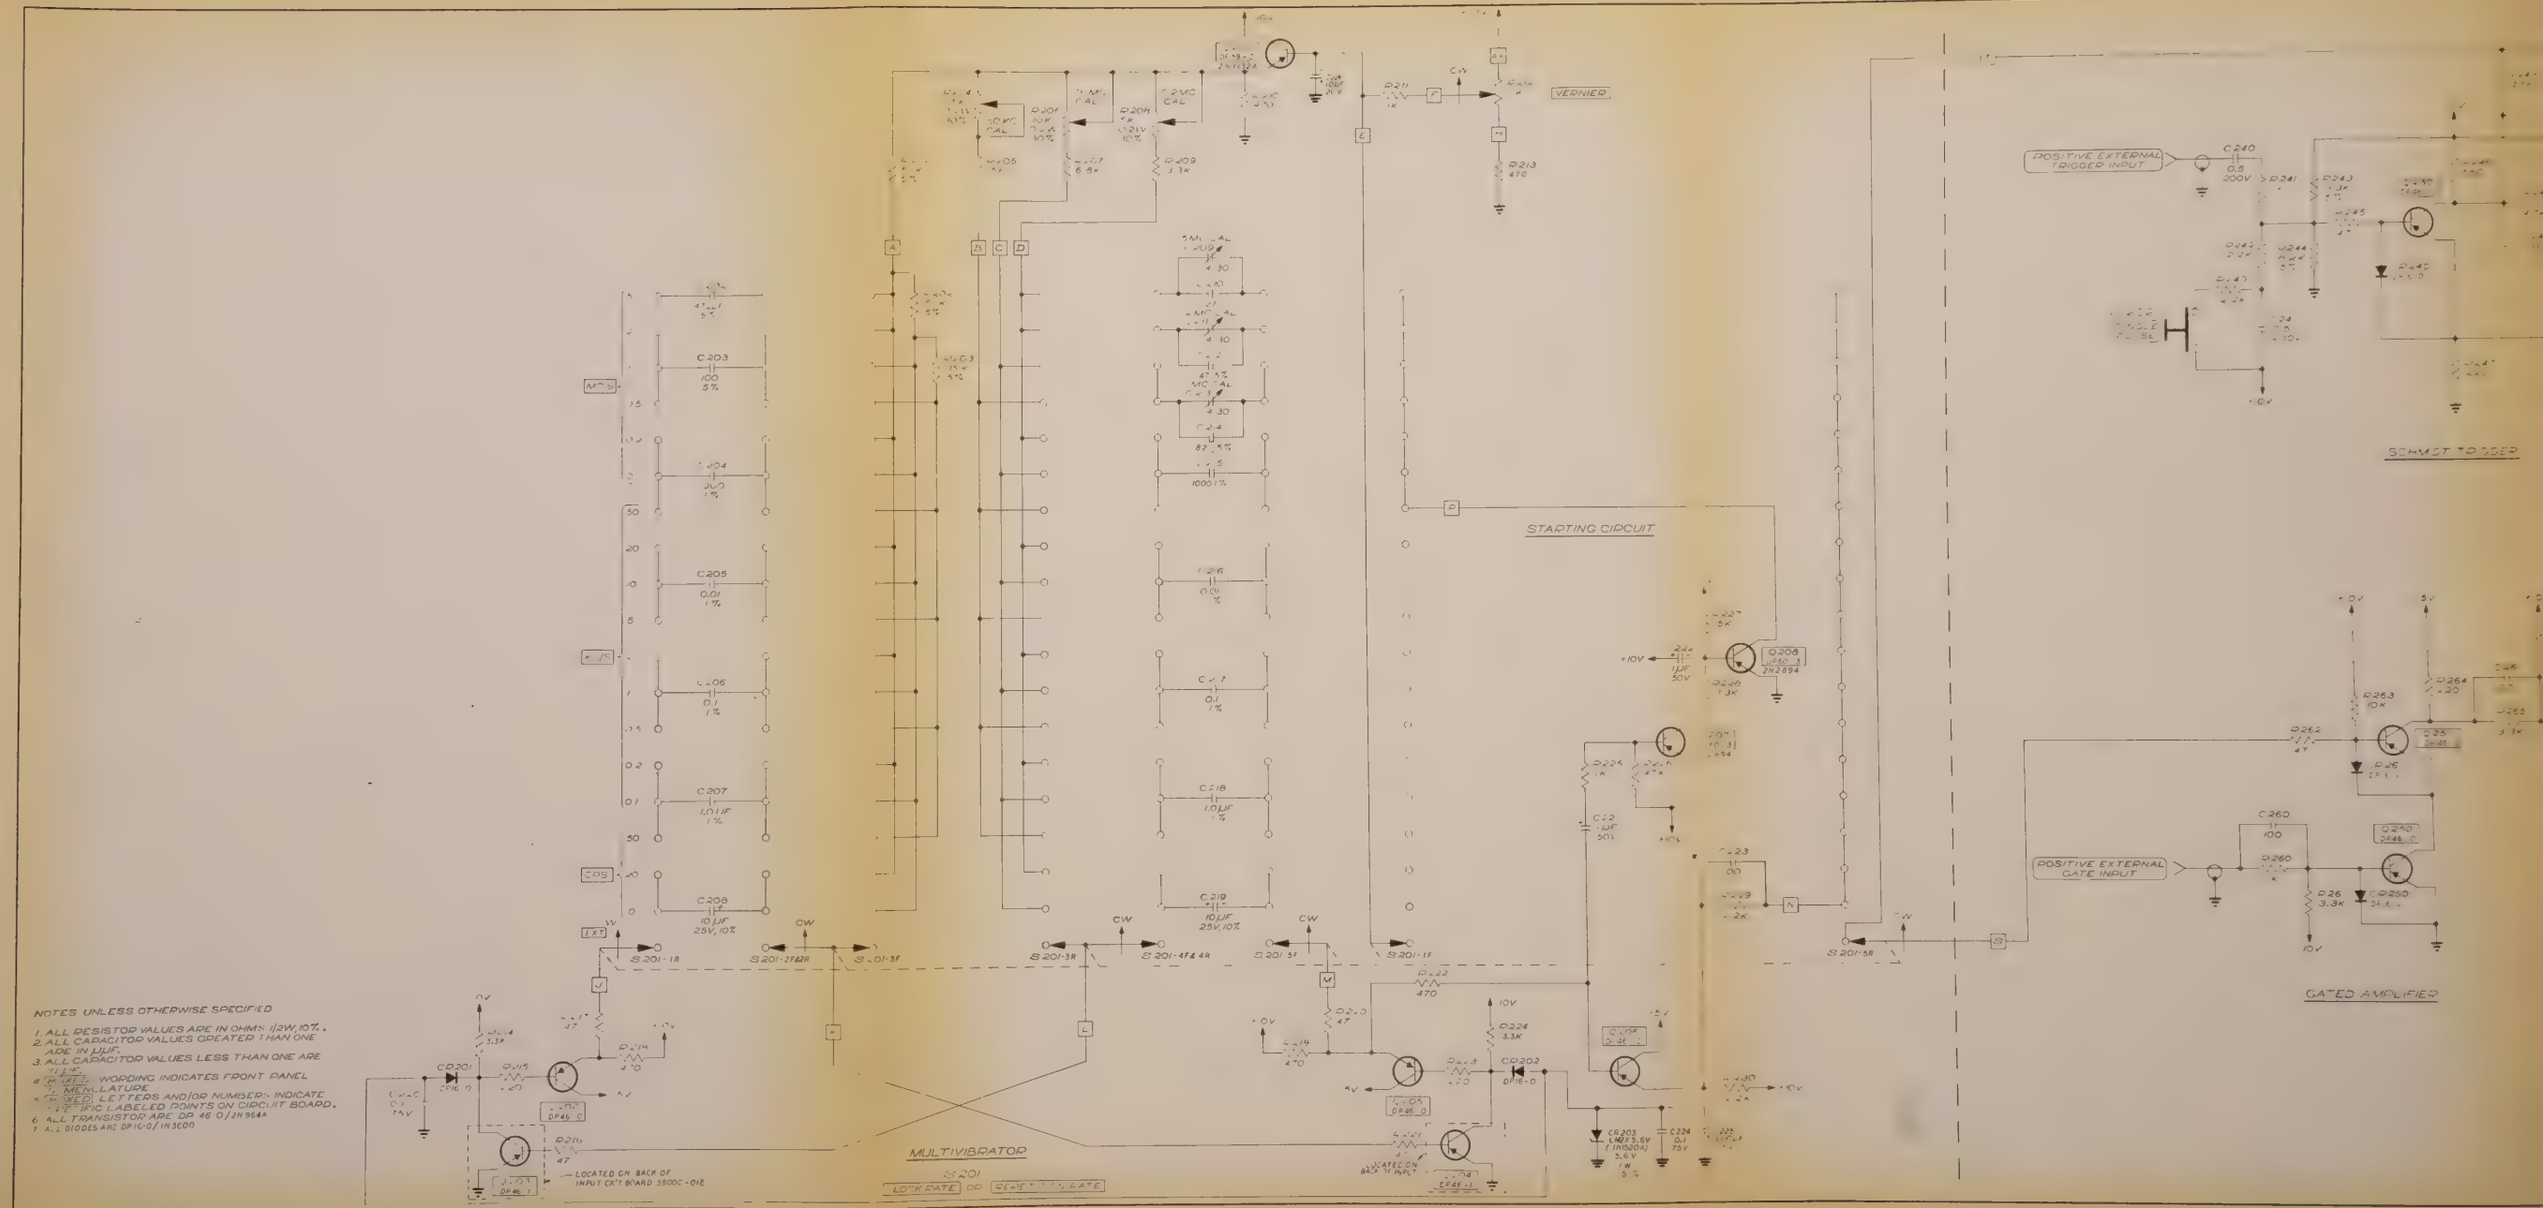
NOTES UNLESS OTHERWISE SPECIFIED
1. ALL RESISTOR VALUES ARE IN OHMS 1/2W, 10%.
2. ALL CAPACITOR VALUES GREATER THAN ONE ARE IN µµF.
3. ALL CAPACITOR VALUES LESS THAN ONE ARE IN µF.
4. (EXT.) WORDING INDICATES FRONT PANEL NOMENCLATURE.
5. (FIXED) LETTERS AND/OR NUMBERS INDICATE I.F. PC LABELED POINTS ON CIRCUIT BOARD.
6. ALL TRANSISTOR ARE DP 46-0 / 2N 964A
7. ALL DIODES ARE DP 16-0 / 1N 3600
MULTIVIBRATOR
S201
LOCK RATE OR SCALE RATE
LOCATED ON BACK OF INPUT CKT BOARD 3800C-018
STARTING CIRCUIT
VERNIER
POSITIVE EXTERNAL TRIGGER INPUT
SCHMITT TRIGGER
POSITIVE EXTERNAL GATE INPUT
GATED AMPLIFIER

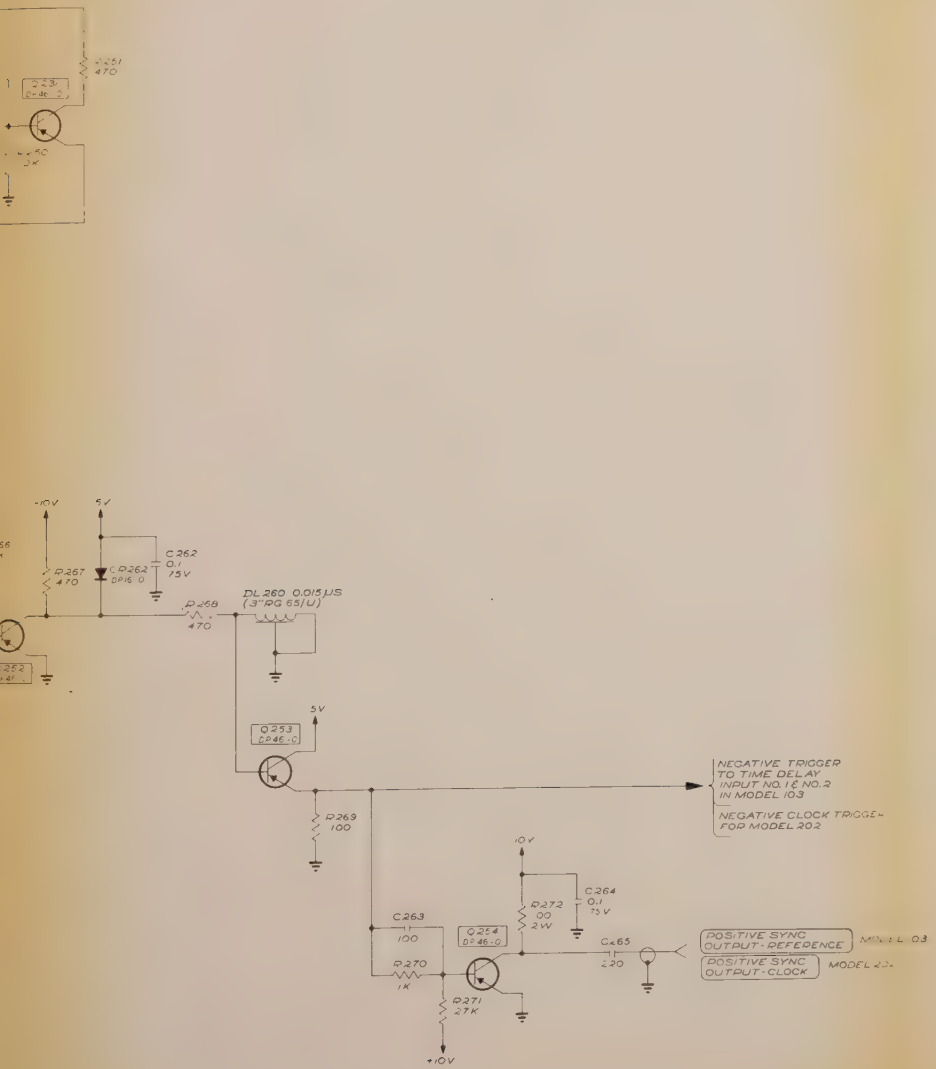

FOR PART REQUIREMENTS SEE L/M

DL260	DL 260	S-03-UP		
Q 201	Q 202	Q 254		
Q 210	Q 254	S-19 229 232 249		
Q 220	Q 262	LR 04 19 241 59		
R 272	265	LR 04 19 244 59		
CR 201	CR 262	S 3 39 - 52 59		
FIRST USED	LAST USED	NEXT U	ASSOC ATED DRAWINGS	USED ON
REFERENCE DESIGNATIONS			ADDL ATION	

SCHEMATIC - MULTIVIBRATOR, INPUT CIRCUITRY & TRIGGER FORMING CIRCUIT

CAWDOR

SIZE A | 40000-D 9 | SHEET

40000-D 9 A

ADDENDA AND ERRATA

E. O. NO.	EFFECTIVE DATE	DWG. NO.	CHANGE
821	1-18-66	J40000-062B	Schematic - Power Supply. Add ferrite bead (one) to emitter lead of Q23, Q63, and Q83.
830	1-26-66	J40000-062B	Schematic - Power Supply Delete C64 and 84 (100 μf, 35V) and add to "Omitted" block.
854	3-7-66	J40000-019A	Schematic - Multivibrator, Input Circuitry and Trigger Forming Circuit Change Q207 and 208 Transistors from DP60-3 to DP60-6, P/N 22605-006.
867	3-17-66	J40000-019A	Schematic - Multivibrator, etc. Change R229 from 2.2k, 1/2w, 10% to 1 k, 1/2w, 10%.
889	4-14-66	J40000-062A	Schematic - Power Supply Delete C1 and C2 (0.1 μf, 400V).
896	4-27-66	J40000-019A	Schematic - Multivibrator, etc. 1. Change Q202, 205, 206, 230, 231, 250-254 from DP46-0 to DP46-1. 2. Change Note 6 accordingly.
		J40000-020A	Schematic - Time Delay, etc. Change Q302, 303, 305, 306, 341, 342, 344-346 from DP46-0 to DP46-1.
2024	6-2-66	J40000-019A	Schematic - Multivibrator, etc. (Gated Amplifier) 1. Cut trace between collector of Q250 and tie point of CR261 and emitter of Q251. 2. Ground tie point of Item 1. 3. Cut trace from emitter of Q252 and return cut portion of trace to ground. 4. Add a jumper from collector of Q250 to emitter of Q252.
2030	6-13-66	J40000-019A	Add Note 8: "DP60-6 may be 2N3640."

ADDENDA AND ERRATA

E. O. NO.	EFFECTIVE DATE	DWG. NO.	CHANGE
2021	8-26-66	Transistor Equiv.	SM 1330 P/N 12685-004 is an acceptable substitute for DP63-6 P/N 22635-006.
2081	8-26-66	Transistor Substitution	2N2102, P/N 12685-005 may be used in lieu of 2N2270, P/N 12695-001.
2093	9-7-66	Tech. Bull. 103M, Para. Rep. Rate	Change Specification in Instruction Manual and Literature Sheet: 1. From "Stability* better than ±0.5%." 2. From ".. jitter is less than 0.02%" to ".. jitter is less than 0.2%."
2099	9-13-66		Change calibration procedure from -5 volts to -6 volts.
2264	5-3-67	Instrument	Artwork - Front Panel of Instrument Add letter "M" (for Power Supply modification) after numerals "103" in the model number area of the front panel. NOTE: All associated documents, such as IL. DL. drawings bearing the legend "103" should be corrected.
2273	5-17-67	TB-Manual	Specifications Change 2 REPETITION RATE - Change to read, "Rep. rate Jitter is less than 0.2%." MAIN PULSE DELAYS - Change to read, "jitter is less than 0.2%."
2367	11-13-67	SB 1-65	Transistor 2N2369A P/N 22635-003 is an acceptable substitute for DP 63-4 P/N 22635-004.
2359	12-1-67	SB 1-65	NPN Transistor equivalent: RCA 38880 is an acceptable equivalent for RCA 40250.
2472	5-27-68	40000-019 40000-062 37000-059,-220 40000-300A 37000-619	1. Change CR203 diode from M4Z5.6V P/N 12154-032 to DP31-569, P/N22314-56 2. Change CR3 diode from M4Z5.6V, P/N 12154-015 to DP31-569, 5.6V, 400mw, 5%, P/N 22314-569. 3. Same as above. 4. In Zone B3 change CR321 and 322 from LMZX5.6V P/N 12154-032 to DP31-569, 5.6V 400mw 5%, P/N 22314-569. 5. Same as above.

E. O. NO.	EFFECTIVE DATE	DWG. NO.	CHANGE
2628	11-22-68	40000-062	Schematic - Power Supply - Delete trace between V, G, & 18.
2675	2-24-69	Manual	Section 5, Paragraph 5.4.1: Change P/N 10305-100, 1 ohm, 10W, 5%, to P/N 10305-109.
2721	5-20-69	Manual	Section 5, Page 5-7, Paragraph 5.4.3: Change DP63-4, P/N 22635-004 to DP63-3 P/N 22635-003.
2990A	5-2070	40000-062	1. Delete R20, 1 ohm, 10 W. Add jumper from A to B. 2. Change R21, 1 k, ½ W, to 4.7 k, ½ W, P/N 10011-472. 3. Add eyelet to trace of R21. Add jumper wire from eyelet to -23 V. Cut trace from Q21-C to R21.
4207	11-13-72	40000-062	For 230 volt operation, change the rating of the fuse to ¾ the value of the 115 V rating. Replace with nearest higher standard value (i.e.), 115 V = 1 amp, 230 V = ¾ amp.
4278	1-25-73	40000-062	Change R9, R28, R42, R69, R72, R89, R91, R101, R104, R121, R124 from 2 W, 20%, P/N10493-501 to 0.2 W, 30%, P/N20240-501.

DATAPULSE DIVISION
SYSTRON DONNER

SEMICONDUCTOR REPLACEMENTS
(Applicable to all Datapulse Models except the Model 102.)

SERVICE BULLETIN 1-65
Revised 8-13-73

The listed commercial diodes and transistors may be suitable replacements for the corresponding Datapulse parts, either as direct substitutes, or as selected for the special performance characteristics given. In certain cases, it may be necessary to use the Datapulse parts.

DATAPULSE TYPE NO.	DATAPULSE PART NO.	COMMERCIAL EQUIVALENT
Diodes:		
DP15-0	22154-000	1N752A selected for $\Delta V < 0.2$ V between 7 mA and 110 mA.
DP15-1	22154-001	Same as DP15-0 but matched in pairs to within 0.1 V.
DP15-201	22154-201	1N936 selected for 9.4 V $\pm$0.1 V @25 mA.
DP16-0	22164-000	1N3600
DP16-1	22164-001	(>80 V, DP16-0)
DP19-0	22194-000	1N2070/1N4005
DP19-6	22194-006	1N2071/1N4005
Transistors:		
DP46-1	22465-001	Selected for h_{fe} = 100 min.
DP59-0	22595-000	2N2904A
DP60-1	22605-001	2N2894 selected for V_{ceo} (sust) = 20 V min.
DP60-2	22605-002	2N3133
DP60-4	22605-004	2N3209
DP60-5	22605-005	FT1702
DP60-6	22605-006	2N3640
DP60-7	22605-007	2N2894 selected for V_{ceo} (sust) = 25 V
DP60-8	22605-008	2N2894A (Motorola) V_{ceo} >20
DP63-2	22635-002	Replaced by DP63-3
DP63-3	22635-003	2N2369A (Fairchild) h_{fe} >70
DP63-4	22635-004	Replaced by DP63-3
DP63-6	22635-006	2N2219A
DP63-8	22635-008	May be replaced by 2N5109 selected for $h_{fe} \geq 20$ @I_c = 0.25 A & V_c = 2.5 V
DP63-9	22635-009	May be replaced by 2N5109 selected for $h_{fe} \geq 20$ @I_c = 0.25 A & V_c = 2.5 V
DP64-0	22645-000	May be replaced by 2N5109 selected for $h_{fe} \geq 20$ @I_c = 0.25 A & V_c = 2.5 V

DATAPULSE DIVISION, SYSTRON-DONNER CORPORATION
10150 W. JEFFERSON BLVD., CULVER CITY, CALIFORNIA 90230 · Phone: (213) 871-0410 · TWX: 910-340-6765

WARRANTY

The Datapulse Division, Systron-Donner Corporation (hereinafter referred to as Datapulse) warrants each instrument of its manufacture to be free from defects in material and workmanship. Our obligation under this Warranty is limited to servicing or adjusting any instrument returned to our factory for that purpose, and to making good at our factory any part or parts thereof except tubes, transistors, fuses or batteries which shall, within one year after making delivery to the original purchaser, be returned to us with transportation charges prepaid, and which our examination shall disclose to our satisfaction to have been thus defective.

Instruments returned under this Warranty will not be accepted at the Datapulse plant without prior authorization by a Datapulse representative or by the service manager of Datapulse.

Datapulse reserves the right to make changes in design at any time without incurring any obligation to install same on units previously purchased.

This Warranty is expressly in lieu of all other obligations or liabilities on the part of Datapulse and Datapulse neither assumes nor authorizes any other person to assume for them any other liability in connection with the sales of Datapulse instruments.

www.manualsplus.com
1011138